



Name

Date

Project

Comments


DESCRIPTION

Absolume's Bright LED tape light provides excellent task lighting and impressive accent options. Its high lumen output and unlimited applications in both the residential and commercial sectors make the BRIGHTseries a popular choice.

INSTALLATION

Peel-and-stick installation. Field-cutttable at marked spots. Solder to connect runs. For indoor use.

DIMENSIONS

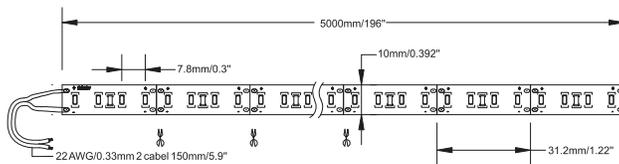

FEATURES

- High quality 3014 chips with exceptional light output of 140 lumens/watt
- Easily applicable in aluminum profiles, channel extrusions, closets, cove areas and practically anywhere
- Available in 3000K, 3500K, and 4000K with excellent color rendering

ORDERING GUIDE

Use this easy ordering guide to determine the SKU for the specific Bright Tape Light you need.

Use a new order guide for each item.

Sample LM-TE-2-H-20-30K-24-16

LM-TE-2-H-20 — — 24 x

LED COLOR

Enter the Kelvin temp (30K, 40K, 50K) -----

VOLTAGE

Input Voltage -----

LENGTH

Enter the length (16', 32' or 100') -----

QUANTITY

How many do you need? -----



MOUNTING

- Peel adhesive backing and stick to surface.
- Can be installed on practically any surface at least .08 inches thick.
- If installing on metallic or another conductive surface, cover the touch area with an insulating material for safety.
- Field-cuttable on marked spots.
- For indoor use only.

CONTROLS

- Standard with a 0-10V continuous dimming driver which dims to 10% and works with most standard 0-10V control/dimmers.
- Connects with energy-saving products like wall dimmers, room controller, occupancy and daylight sensors, and lighting relay panels.

COMPLIANCE


Constructed of UL recognized components, these indoor luminaries are cULus listed for 25°C ambient environments, IC rated for direct insulation contact, RoHS compliant, damp location listed, and comply with IESNA LM-79 and LM-80 standards. NEMA 410 Compliant and classified for DLC Standard.

WARRANTY

Three-year warranty



Model	CCT	Luminous Flux (lm/ft)	Width (inches)	Length (ft)	Min Length (inches)	DC Voltage (V)	LED Qty. (ft)	Rated Watt (w/ft)	Thickness (in)
LM-TE-2-H-20-30K-24	30K, 35K, 40K	446 lm/ft	0.4	16, 32, 100	1.2	24	39	3.5	0.06
LM-TE-2-H-20-35K-24	30K, 35K, 40K	482 lm/ft							
LM-TE-2-H-20-40K-24	30K, 35K, 40K	490 lm/ft							

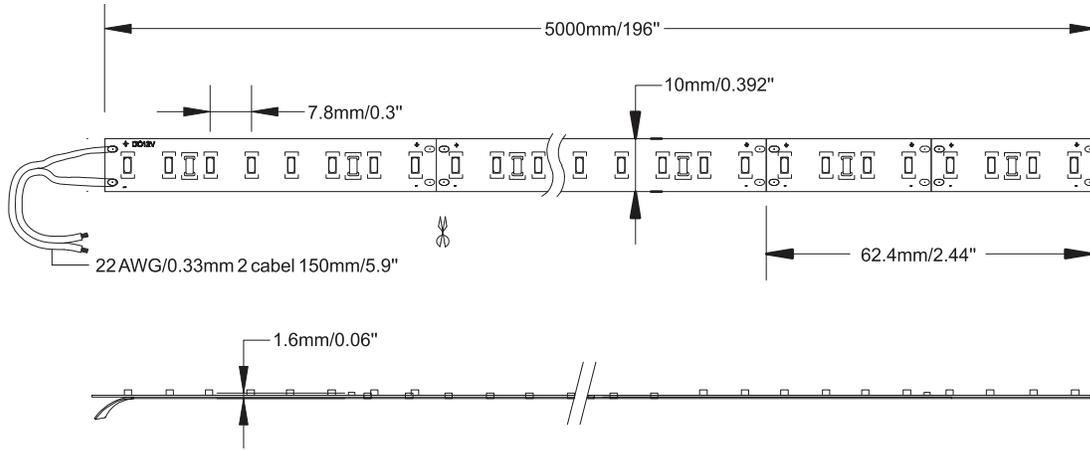

39 BRIGHT CHIPS PER FT



NEW PACKAGING INFO TABLE

	Gross Weight (lbs)	Inner Box Size (inches)	Outer Carton Size (inches)
4"x1'	2	2PCS per box 19.3x6x4.9	24PCS per carton 20.7x20.5x19.3
4"x2'	3.1	2PCS per box 31.3x6x4.9	18PCS per carton 32.7x15.6x19.3
4"x4'	4.6	2PCS per box 5.5x6x4.9	12PCS per carton 56.7x10.6x19.3
4"x6'	5.7	2PCS per box 79x4.8x6.3	8PCS per carton 80.1x10.2x14.2
4"x8'	7.3	2PCS per box 103.3x4.8x6.3	4PCS per carton 104.1x5.5x14.2
6"x1'	2.4	2PCS per box 19.3x8x4.9	24PCS per carton 20.7x20.5x25.2
6"x2'	3.3	2PCS per box 31.3x8x4.9	18PCS per carton 32.7x15.6x25.2
6"x4'	5.5	2PCS per box 55x8x4.9	12PCS per carton 56.7x10.6x25.2
6"x6'	7.5	2PCS per box 79x4.8x8.3	8PCS per carton 80.1x10.2x17.7
6"x8'	9.5	2PCS per box 103.3x4.8x8.3	4PCS per carton 104.1x5.5x17.7



**SAFETY
INFORMATION**

IMPORTANT: Read carefully before installing tape light. Retain for future reference.

Absolume assumes no responsibility for claims brought about by improper or careless installation or handling of this product.

CAUTION

- Edges may be sharp. Handle with care.
- Risk of burn. Disconnect power and allow fixture to cool before maintenance.
- Risk of electric shock. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Connect fixture to a 120/277-volt, 60 Hz power source. Any other connection voids the warranty.
- Protect tape light from being folded or crushed before and during installation.
- Ensure that the surface selected for installation will not be exposed to damage.
- For indoor use only, not waterproof or corrosion proof.
- Only a professional familiar with electrical safety standards should install this tape light.
- Cut only on marked spots.
- Prevent electrostatic during installation.

NOTICE

Use 16-12 AWG solid or stranded wire for push-in terminals.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING

- Risk of fire, electrical shock, cuts and or other casualty hazards. This product must be installed in accordance with the applicable installation code by a qualified electrician or a person familiar with the construction and operation of the product and the hazards involved.
- FCC Regulations state that any unauthorized changes or modifications to this equipment not expressly approved by the manufacturer may void the user's authorization to operate this equipment.

WARRANTY

This product is warranted to be free from defects in workmanship and materials for up to 5 years from date of purchase. If it fails, please contact Absolume at info@absolume.com or call 1-732-369-1140 to receive a replacement.

Absolume shall bear no responsibility or liability for any faults, in case of improper operation, use, negligence, accident or exposure to natural hazard, or excessive use over the limits specified for the unit, or if any unauthorized alteration or repair followed.

Attention Receiving Department:

Note any fixture shortages or noticeable damage at the time of delivery.

File claims for common carrier (LTL) directly with the carrier. Claims for concealed damage must be filed within 15 days of delivery. All damaged material, complete with original packing must be retained.